

ユニットキースイッチ

UNIT KEYSWITCHES

S-34

S



S-34



キーNo.3413 key


PAT.PEND.

特徴 Feature

- スイッチの組合せにより、多種多様な接点構成が可能です。
- キー回転範囲、抜き位置は45°ステップにて製作可能です。
- Combining switches, a wide variety of contact structures are available.
- Key turning range and inserted/removed position are available at 45° step.

仕様	● 製品質量：68g ● 材質：亜鉛合金 (ZDC) ● 表面仕上：クロムめっき (MZCr)
用途	● レジスター・コンピュータ・電源装置
納期	● 標準品・・・即納します
スイッチ部	● 定格：DC28V・100mA (最小DC20mV・10μA)
特性	● 接触抵抗：100mΩ以下 ● 絶縁抵抗：100MΩ以上 (DC250Vメガ) ● 耐電圧：(50/60Hz、1分間) 非連続端子間 AC200V 各端子と非充電金属部間 AC1500V
備考	● 耐久性：機械的/3万回以上 電氣的/1万5000回以上 ● 接点材料：金めっき ● 特注仕様 (キー回転範囲・抜き位置・スイッチ構成等) も製作致します。

Specifications	● Mass: 68g ● Material: Zinc alloy (ZDC) ● Finish: Chrome plating (MZCr)
Specific use	● Registers, computers and power supplies
Switch characteristic	● Rated: DC 28V 100mA (min. DC 20mV 10μA) ● Contact resistance: 100mΩ or less ● Insulation resistance: 100MΩ or more (DC250V mega) ● Withstand voltage: (50/60 Hz, one minute) Between non-continuous terminals: AC200V Between each terminal and non-charged metal: AC1500V
Remarks	● Durability: Mechanical: 30,000 times or more Electrical: 15,000 time or more ● Contact material: Gold plating ● Specifications other than described above (key turning range, inserted/removed position, switch structure etc) are available.

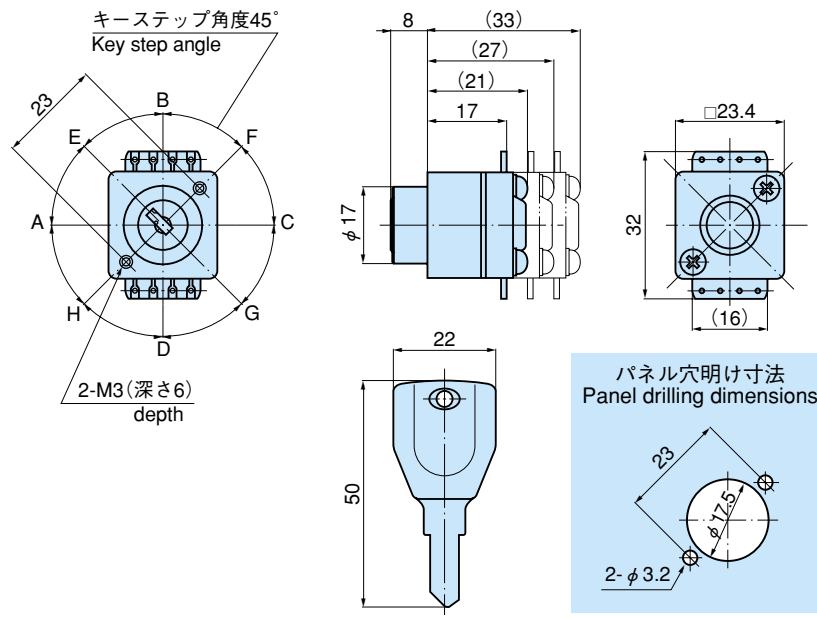


接点構成表 Contact structures table

商品番号 Product No.	鍵回転角度 Key turning angle	A	E	B	F
S-34-E90-EF-1G		SW1	COM o1 o2		COM o1 o2
S-34-E90-EF-3G		SW1	COM o1 o2 o3		COM o1 o2 o3
S-34-A90-AEB-1G		SW1	COM o1 o2	COM o1 o2	COM o1 o2
S-34-A90-AEB-2G		SW1	COM o1 o2	COM o1 o2	COM o1 o2
S-34-A90-AEB-3G		SW1	COM o1 o2 o3	COM o1 o2 o3	COM o1 o2 o3
S-34-A90-AEB-4G		SW1	COM o1 o2	COM o1 o2	COM o1 o2
		SW2	COM o1 o2	COM o1 o2	COM o1 o2

SW.No.	端子位置 Terminal position
1G 2G	
3G	
4G	


<品番設定方法> <Code setting method>

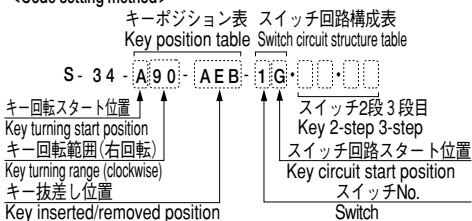


商品番号 Product No.	コード Code	価格 Price	箱入数 Quantity per box
S-34-E90-EF-1G	40358	¥2,000	
S-34-E90-EF-3G	40359	¥2,100	
S-34-A90-AEB-1G	40360	¥2,000	
S-34-A90-AEB-2G	40361	¥2,000	
S-34-A90-AEB-3G	40362	¥2,100	
S-34-A90-AEB-4G	40363	¥2,100	

[切替タイプ Switching type]

<品番設定方法 Code setting method>



<キーポジション Key position>

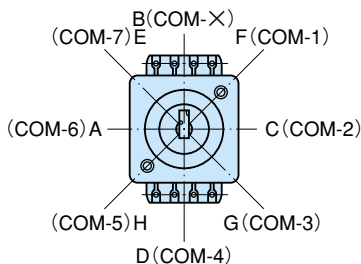

<端子位置 Terminal position>

