

コントロール キースイッチTKS-8型

CONTROL KEYSWITCHES

コントロール
キースイッチ

ソレノイド付
キースイッチ

オペレーター
キースイッチ

止め金付
キースイッチ

マスター付
キースイッチ

モニター
キースイッチ

マイクロ
キースイッチ



S-8-90-B




イギリス意匠登録
U.L.・C.S.A.登録品

キーNo.GA001
Key

特徴 Feature

- 鍵違いが豊富にできます。
- 反転スイッチ機構
- A wide variety of key differences are available.
- Reversible switch mechanism.

仕様	●材質：亜鉛合金 (ZDC) ●表面仕上：ステンレスカバー ●同一鍵番号・鍵違いがあります。
用途	●各種コンピュータ・電源装置
納期	●標準品・・・即納します
スイッチ部特製	●定格：AC125V・3A (抵抗負荷) DC30V・3A (抵抗負荷) ●接触抵抗：20mΩ以下 ●絶縁抵抗：100MΩ以上 (DC500Vメガ) ●耐電圧：(50/60Hz、1分間) 非連続端子間 AC1000V 各端子と非充電金属部間 AC1500V
備考	●耐久性：1万5000回以上 ●切替接点：1回路2接点型・2回路2接点型 ●接点材料：銀めっき ●絶縁材料：DAP樹脂 ●U.L.・C.S.A.認定品は受注生産です。 ●掲載以外の商品は、お問合せ下さい。

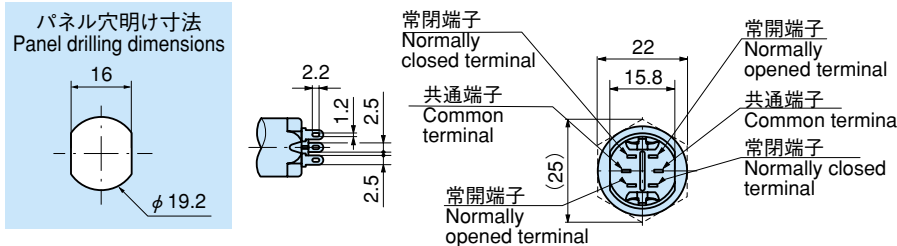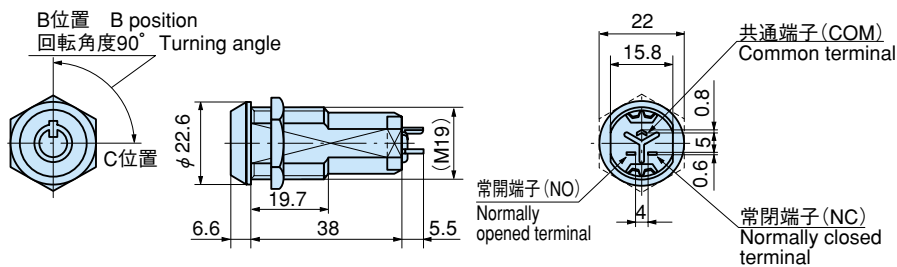

(2回路2接点型の裏面)
(Back of two-circuit-two-contact type)

Specifications	●Material: Zinc alloy (ZDC) ●Finish: stainless cover ●Keyed alike and key differences are available.
Specific use	●Various computers and power supplies
Switch characteristic	●Rated: AC 125V 3A (resistance load) DC 30V 3A (resistance load) ●Contact resistance: 20mΩ or less ●Insulation resistance: 100MΩ or more (DC 500V mega) ●Withstand voltage: (50/60 Hz, one minute) Between non-continuous terminals: AC1000V Between each terminal and non-charged metal: AC1500V
Remarks	●Durability: 15,000 time or more ●Switch contact: One-circuit-two-contact/Two-circuit-two-contact ●Contact material: Silver plating ●Insulation material: DAP resin ●UL and CSA approved are custom-made.

接点構成表
Contact structures table

商品番号 Product No.	鍵回転角度 Key turning angle	B位置 B position	C位置 C position
S-8-90-B-1 同番 (1回路2接点型) keyed alike (one-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-8-90-B-1 鍵違い (1回路2接点型) key differences (one-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-8-90-BC-1 同番 (1回路2接点型) keyed alike (one-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-8-90-BC-1 鍵違い (1回路2接点型) key differences (one-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-8-90-B-2 同番 (2回路2接点型) keyed alike (two-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW ₁ COM NO NC SW ₂ COM NO NC	● SW ₁ COM NO NC SW ₂ COM NO NC
S-8-90-B-2 鍵違い (2回路2接点型) key differences (two-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW ₁ COM NO NC SW ₂ COM NO NC	● SW ₁ COM NO NC SW ₂ COM NO NC
S-8-90-BC-2 同番 (2回路2接点型) keyed alike (two-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW ₁ COM NO NC SW ₂ COM NO NC	● SW ₁ COM NO NC SW ₂ COM NO NC
S-8-90-BC-2 鍵違い (2回路2接点型) key differences (two-circuit-two-contact type)	B位置 B position 90° C位置 C position	● SW ₁ COM NO NC SW ₂ COM NO NC	● SW ₁ COM NO NC SW ₂ COM NO NC

商品番号 Product No.	製品質量 (g) Mass	コード Code	価格 Price	箱入数 Quantity per box
S-8-90-B-1同番 keyed alike	84	40053	¥1,160	50
S-8-90-B-1鍵違い key differences		40054	¥1,280	
S-8-90-B-2同番 keyed alike		40196	¥1,210	
S-8-90-B-2鍵違い key differences		40197	¥1,320	
S-8-90-BC-1同番 keyed alike		40055	¥1,160	
S-8-90-BC-1鍵違い key differences		40056	¥1,280	
S-8-90-BC-2同番 keyed alike		40198	¥1,210	
S-8-90-BC-2鍵違い key differences		40199	¥1,320	