

# コントロール キースイッチTKS-9型

# S-9

CONTROL KEYSWITCHES

C.S.A.登録品 No. : LR65938-3M  
U.L.登録品 No. : E106043



特徴 Feature

- コンパクトなスイッチ機構
- 反転スイッチ機構
- Compact switch mechanism.
- Reversible switch mechanism.

**仕様** ●材 質：亜鉛合金 (ZDC)  
●表面仕上：ステンレスカバー  
●同一鍵番号・鍵違いがあります。

**用途** ●各種コンピュータ・電源装置

**納期** ●標準品・・・即納します

**特製** ●定 格：AC125V・3A (抵抗負荷)  
DC30V・3A (抵抗負荷)

●接触抵抗：20mΩ以下  
●絶縁抵抗：100MΩ以上 (DC500Vメガ)  
●耐電圧：(50/60Hz、1分間)  
非連続端子間 AC1000V  
各端子と非充電金属部間 AC1500V

●耐久性：1万5000回以上  
●切替接点：1回路2接点型・2回路2接点型  
●接点材料：銀めっき  
●絶縁材料：DAP樹脂

**備考** ●U.L・C.S.A.認定品は受注生産です。  
●掲載以外の商品は、お問合せ下さい。


**Specifications** ●Material: Zinc alloy (ZDC)  
●Finish: stainless cover  
●Keyed alike and key differences are available.

**Specific use** ●Various computers and power supplies

**Switch characteristic** ●Rated: AC 125V 3A (resistance load)  
DC 30V 3A (resistance load)  
●Contact resistance: 20mΩ or less  
●Insulation resistance: 100MΩ or more (DC 500V mega)  
●Withstand voltage: (50/60 Hz, one minute).  
Between non-continuous terminals: AC1000V  
Between each terminal and non-charged metal: AC1500V

●Durability: 15,000 time or more  
●Switch contact: One-circuit-two-contact/Two-circuit-two-contact  
●Contact material: Silver plating  
●Insulation material: DAP resin

**Remarks** ●UL and CSA approved are custom-made.

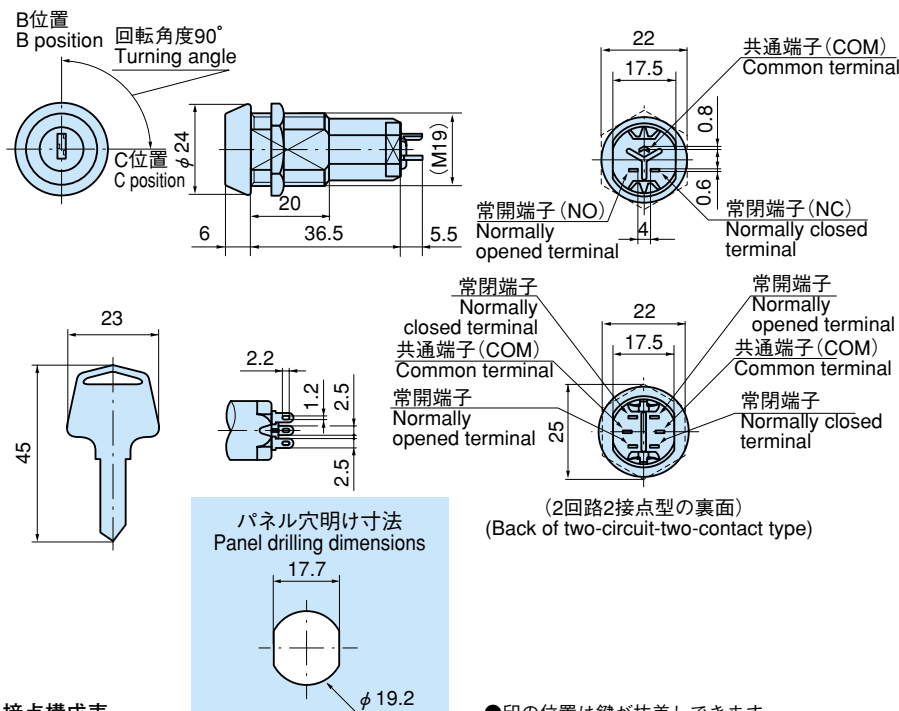

接点構成表  
Contact structures table

商品番号 Product No.	鍵回転角度 Key turning angle	B位置 B position	C位置 C position
S-9-90-B-1 同番 (1回路2接点型) keyed alike (one-circuit-two-contact type)	90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-9-90-B-1 鍵違い (1回路2接点型) key differences (one-circuit-two-contact type)	90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-9-90-BC-1 同番 (1回路2接点型) keyed alike (one-circuit-two-contact type)	90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-9-90-BC-1 鍵違い (1回路2接点型) key differences (one-circuit-two-contact type)	90° C位置 C position	● SW COM NO NC	● SW COM NO NC
S-9-90-B-2 同番 (2回路2接点型) keyed alike (two-circuit-two-contact type)	90° C位置 C position	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC
S-9-90-B-2 鍵違い (2回路2接点型) key differences (two-circuit-two-contact type)	90° C位置 C position	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC
S-9-90-BC-2 同番 (2回路2接点型) keyed alike (two-circuit-two-contact type)	90° C位置 C position	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC
S-9-90-BC-2 鍵違い (2回路2接点型) key differences (two-circuit-two-contact type)	90° C位置 C position	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC	● SW <sub>1</sub> COM NO NC SW <sub>2</sub> COM NO NC

商品番号 Product No.	製品質量(g) Mass	コード Code	価格 Price	箱入数 Quantity per box
S-9-90-B-1同番 keyed alike	66	40057	¥1,160	50
S-9-90-B-1鍵違い key differences		40058	¥1,280	
S-9-90-B-2同番 keyed alike		40200	¥1,210	
S-9-90-B-2鍵違い key differences		40201	¥1,320	
S-9-90-BC-1同番 keyed alike		40059	¥1,160	
S-9-90-BC-1鍵違い key differences		40060	¥1,280	
S-9-90-BC-2同番 keyed alike		40202	¥1,210	
S-9-90-BC-2鍵違い key differences		40203	¥1,320	