


## ロータリーダンパー


黄銅製 B-876

## ROTARY DAMPERS

B



B-876-1-R



B-876-2-R



B-876-3-R

PAT.PEND.

## 特徴 Feature

- ガスダンパー等のステータイプではない為スペースを取りません。
- 100°回転範囲内で高トルクのダンパー特性が得られます。
- 右回転用、左回転用
- Requires less space for installation because the product is not stay type like gas damper.
- High torque damper characteristic can be gained within a 100° of turning range.
- Two types, one for the clockwise turning and the other for the counterclockwise turning.

## 仕様

- 材質：本体／黄銅铸件 (YBsC)  
シャフト／ステンレス鋼棒 (SUS304)

用途  
納期  
備考

- バス・列車のハットラック、サービスボックス
- 特注品・・・納期ご連絡します
- 耐久試験：30万回以上

(定格負荷トルクにて)

- 使用温度範囲：-5°C~45°C

- オイル膨張吸収装置付もあります。

(使用温度範囲 -5°C~70°C)

- 回転範囲内に必ずストッパーを設けて下さい。

- 許容軸荷重を越える場合は必ず軸受けを設けて下さい。



## Specifications

- Material: Main unit: Cast brass (YBsC)  
Shaft: Stainless steel (SUS304)

Specific use  
Remarks

- Hat racks, service boxes of buses and trains.

## ● Endurance test:

300 thousand times or more  
(with the rated load torque)


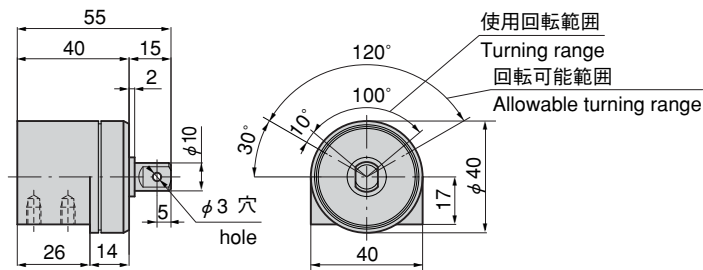

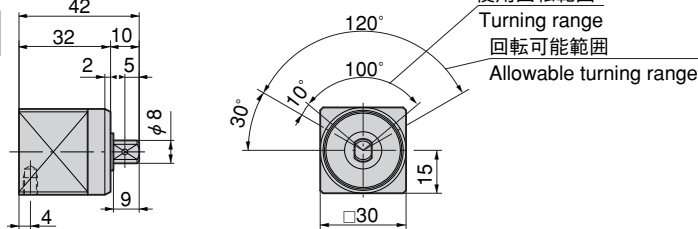

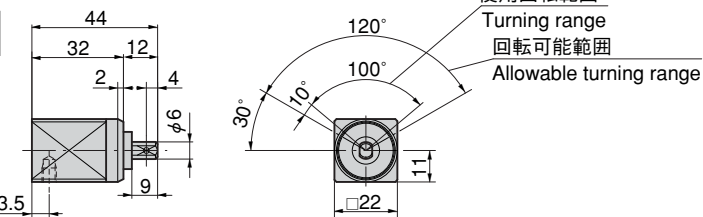
- Temperature range of use: -5°C to 45°C

- The oil expansion and absorption device can also available.


(Temperature range of use: -5°C to 70°C)

- Be sure to set the stopper plate within the turning range.

- Be sure to install the bearing when going beyond the allowable axial load.

(B-876-1-L)  
(B-876-1-R)(B-876-2-L)  
(B-876-2-R)(B-876-3-L)  
(B-876-3-R)

## 作動図 Operation diagram



商品番号 Product No.		RoHS	CAD	定格負荷トルク Rated load torque cN·m (kgf·cm)	破壊トルク Breaking torque cN·m (kgf·cm)	許容軸荷重 Allowable axial load N (kgf)	製品質量(g) Mass	コード Code		単価 Price		箱入数 Quantity per box
左回転用 Counterclockwise turning	右回転用 Clockwise turning							左回転用 Counterclockwise turning	右回転用 Clockwise turning			
B-876-1-L	B-876-1-R	●		290~390(30~40)	3920(400)以上	19.6 (2)	360	11433	11434	¥8,200	¥8,200	20
B-876-2-L	B-876-2-R	●		98~140(10~15)	2940(300)以上	9.8 (1)	150	11435	11436	¥5,500	¥5,500	40
B-876-3-L	B-876-3-R	●		78~110(8~12)	1960(200)以上	4.9 (0.5)	105	11437	11438	¥5,700	¥5,700	60

●: RoHS指令対応品 ▲: RoHS指令に対応可能です。お問合せ下さい。

※箱単位はご相談下さい。