

# 米国軍用規格長蝶番 (MS規格) MS-20257・MS-35822・MS-35823・MS-35825

## MILITARY STANDARD CONTINUOUS HINGES






### 特徴 Feature

- アルミ製で耐食性・耐薬品性に優れています。
- 切断して使用できます。
- Corrosion-resistant/chemical-resistant aluminum is.
- Cut and use.

- 仕様**
- 材質：アルミニウム合金板 (軸はステンレス製)
  - 表面仕上：アルマイト処理
- 用途**
- 航空機・通信機器・測定機器・船舶・車両・小型コンテナなどの筐体
- 納期備考**
- 標準品・・・納期お問合せ下さい。
  - 輸入品のため色が異なることがあります。
  - 航空機にはMS規格品をご使用下さい。
  - 必要な寸法に切断後軸にカシメ等の抜け止め加工をしてご使用下さい。

- Specifications**
- Aluminum alloy plate. (Shaft: Stainless steel)
  - Finish: Alumite treatment
- Specific use**
- Cases for aircraft, communication equipment, measuring equipment, ships, vehicles and small containers

- Remarks**
- A color is sometimes different for the imports.
  - The MS (Military Standard) articles must be used for the air crafts.
  - The hinge is not processed to prevent extraction of the shaft. After cutting the hinge to size and before use, fix stops, etc., on the shaft to prevent its extraction.

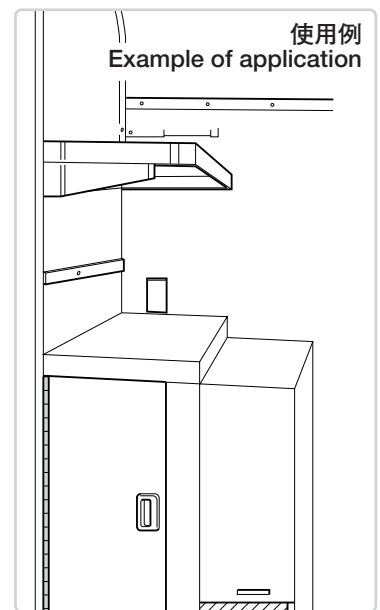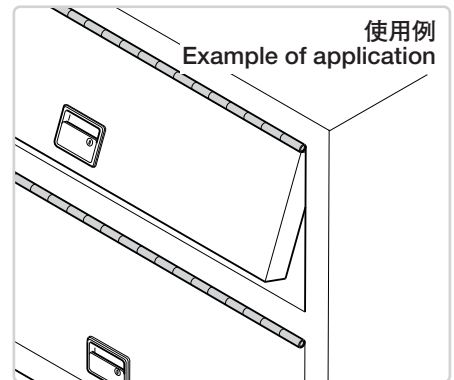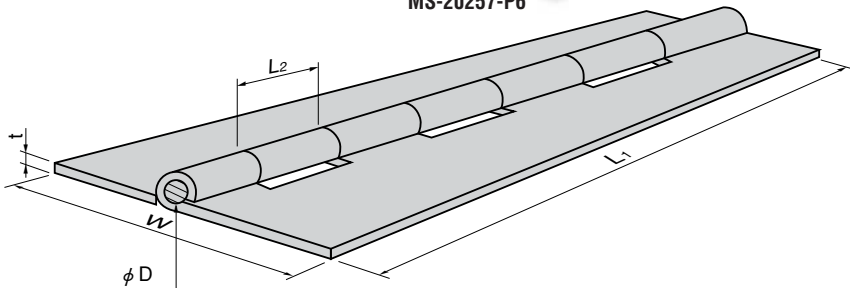

商品番号 Product No.	RoHS	CAD	L <sub>1</sub>	L <sub>2</sub>	W	t	φ D	製品質量(g) Mass	コード Code	単価 Price	箱入数 Quantity per box
MS-35822-9A	▲		1829	15	27	1.0	3.0	180	12463	¥5,000	5
MS-35822-10A	▲		1829	15	32	1.0	3.0	210	12464	¥5,000	
MS-35822-11A	▲	●	1829	15	38	1.0	3.0	235	12465	¥5,000	
MS-35822-12A	▲		1829	15	51	1.0	3.0	320	12466	¥7,000	
MS-35823-6A	▲		1829	15	38	1.2	3.0	320	12467	¥9,000	
MS-35823-7A	▲		1829	15	51	1.2	3.0	400	12468	¥9,000	
MS-35825-14A	▲		2133	25	38	1.5	3.0	480	12469	¥10,000	
MS-35825-15A	▲		2133	25	51	1.5	3.0	600	12470	¥11,000	
MS-35825-16A	▲		2133	25	64	1.5	3.0	690	12471	¥13,000	

軸はステンレス製です。Shaft is made of stainless steel ※箱単位はご相談下さい。

商品番号 Product No.	RoHS	L <sub>1</sub>	L <sub>2</sub>	W	t	φ D	製品質量(g) Mass	コード Code	単価 Price	箱入数 Quantity per box
MS-20257-P1	▲	72 (1829)	1/2 (12.7)	3/4 (19.1)	0.032 (0.8)	0.062 (1.6)	120	12457	¥10,000	5
MS-20257-P2	▲	72 (1829)	1/2 (12.7)	1 1/16 (27.0)	0.040 (1.0)	0.089 (2.3)	245	12458	¥10,000	
MS-20257-P3	▲	72 (1829)	1/2 (12.7)	1 1/4 (31.8)	0.040 (1.0)	0.089 (2.3)	220	12459	¥10,000	
MS-20257-P4	▲	72 (1829)	1/2 (12.7)	1 1/2 (38.1)	0.040 (1.0)	0.089 (2.3)	270	12460	¥10,000	
MS-20257-P5	▲	72 (1829)	1/2 (12.7)	2 (50.8)	0.052 (1.3)	0.089 (2.3)	425	12461	¥10,000	
MS-20257-P6	▲	72 (1829)	2 (50.8)	2 (50.8)	0.064 (1.6)	0.179 (4.5)	700	12462	¥12,000	

単位はインチ・( )内寸法はmmを示します。Unit: inches/dimensions in parentheses: mm ※箱単位はご相談下さい。

● : RoHS指令対応品 ▲ : RoHS指令に対応可能です。お問合せ下さい。

長蝶番

平蝶番

裏蝶番

抜き差し蝶番

段付蝶番

クリーンヒンジ

特装車蝶番

フリーザーヒンジ

特殊蝶番

トルクヒンジ

ステー

周辺機器 (B)