

ボールキャッチ

BALL CATCHES



ステンレス製 C-1090

亜鉛合金製 C-90

特徴 Feature

- ステンレス製で耐食性に優れています。(C-1090)
- 高温、多湿、振動機器に最適です。
- スムーズに抜き差しできます。
- Corrosion-resistant stainless steel is used. (C-1090)
- Suitable for high temperature and humidity area and vibration equipment.
- Can be inserted/ removed smoothly.

〔C-1090〕

仕様 ● 材質：本体・受け/ステンレス鋼铸件(SUS304)
その他/ステンレス(SUS304)

- 用途 ● 表面仕上：電解研磨
- 納期 ● 環境機器・通信機器・船舶・車両
- 備考 ● 標準品・・・即納します
- SUS 316も製作致します。お問合せ下さい。

〔C-90〕

仕様 ● 材質：亜鉛合金 (ZDC)

● 表面仕上：クロムめっき (MZCr)

用途 ● 小型配分電盤・計測機械・工作機械

納期 ● 標準品・・・即納します

〔C-1090〕

Specifications ● Material: Main body and Base plate: Cast stainless steel (SUS304)
The others: Stainless steel (SUS304)

Specific use ● Finish: Electrolytic polishing

● Environment and communication equipment, ships and vehicles

〔C-90〕

Specifications ● Material: Zinc alloy (ZDC)

● Finish: Chrome plating (MZCr)



Specific use ● Small power/ distribution boards, measuring equipment and machine tools



C-1090-0




C-1090-2

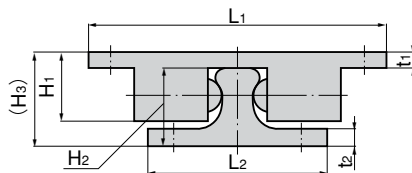


2-M₂用皿穴
countersink

2-M₁用皿穴
countersink

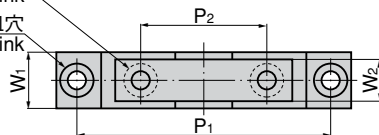

使用例 Example of application



90°使用もできます。
can be used in the perpendicular.

商品番号 Product No.		RoHS		CAD	L ₁	L ₂	L ₃	W ₁	W ₂	H ₁	H ₂	(H ₃)	t ₁	t ₂	P ₁	P ₂	M ₁	M ₂	抜き参考荷重N (kgf) Insertion/removal load (reference)		製品質量(g) Mass		SUS			ZDC			
SUS	ZDC	SUS	ZDC																	抜き Removal	差し Insertion	SUS	ZDC	コード Code	単価 Price	箱入数 Quantity per box	コード Code	単価 Price	箱入数 Quantity per box
C-1090-0	C-90-0	●	▲	●	70	42	10.5	13	10	17	19	23	4	4	60	30	M4	M4	50 (5.1)	50 (5.1)	78	70	23531	¥1,600	50	20358	¥430	50	
C-1090-1	C-90-1	●	▲	●	50	30	7.5	10	9	12	13	16	2.5	2.5	40	20	M4	M4	18.6 (1.9)	27.4 (2.8)	28	25	23532	¥1,500	100	20359	¥210	150	
C-1090-2	C-90-2	●	▲	●	43	25	6	8	7.5	10	11	13.5	2.5	2.5	35	16	M3	M3	8.8 (0.9)	19.6 (2.0)	16	15	23533	¥1,450	200	20360	¥200	200	

● : RoHS指令対応品 ▲ : RoHS指令に対応可能です。お問合せ下さい。

※箱単位はご相談下さい。

C

ファスナー

ラッチ錠

ドア
キャッチ

スナッチ
ロック

コントロール
センター

工業用
錠前

周辺機器
(C)

フリーザー
金具